

COACH MODEL : T2140, T2145, C2045
DATE : 03/28/2011
SUBJECT : How to reinstall and wind passenger shades



Top of Shade

Use flat tip screw driver to unlock shade for removal.



Lock is only on one side.




Spring tension side.

To wind shade, use a pair of vice grip pliers and turn clock wise approximately 11 turns. Reinstall shade and try the operation of shade and adjust as needed.



To remove or reinstall bottom guide. Using a flat tip screw driver remove the clip on both side of shade. Remove oil felt and install shade guide first, then the oiler, and reinstall clips.

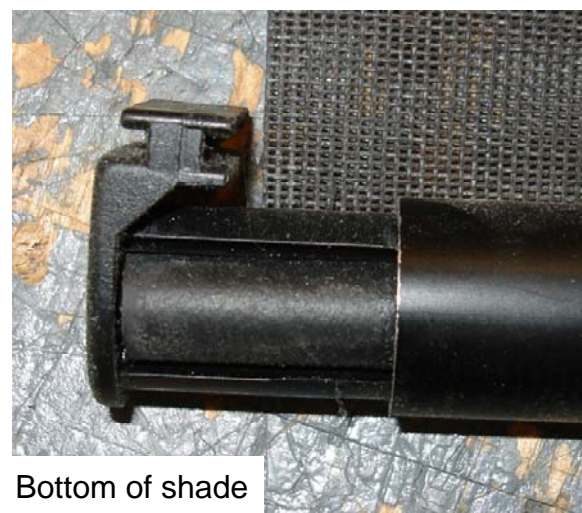

Bottom of shade