

COACH MODEL : C0245, T2140, T2145, TD925


DATE : 5/15/2012

SUBJECT : How To Remove and Replace A Key Cylinder

Step 1: An extra key is needed, any VanHool door key will work.



Step 2: Take key and grind the key stops, back about 1/8" on both sides.

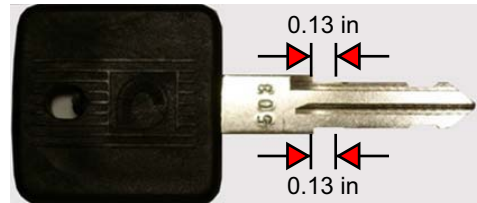

Step 3: Look at the ring around the cylinder as shown in Figure 1. There are two styles, a silver one that can be changed, the black ring type can not be changed and must be replaced as an assembly.



Step 4: Insert the grounded down key.



Step 5: Apply a little side pressure and pull the cylinder out.



Step 6: Remove key from cylinder.



Note: To open the door, used a square key to unlock .



Installing door lock cylinder

Insert cut key in cylinder, turn key so numbers on key are facing towards the rear on the handle, install cylinder into door handle.

