

**COACH MODEL :** T2140, T2145


**DATE :** 7/19/2012

**SUBJECT :** How To Change The Roof Mounted Fresh Air Vent Cylinder.

## Safety Warning!

Procedure for changing fresh air cylinder requires the Technician to work on the roof and safety overhead equipment should be used.

Step 1: Remove screws from roof cover of the cylinder that is being replace.

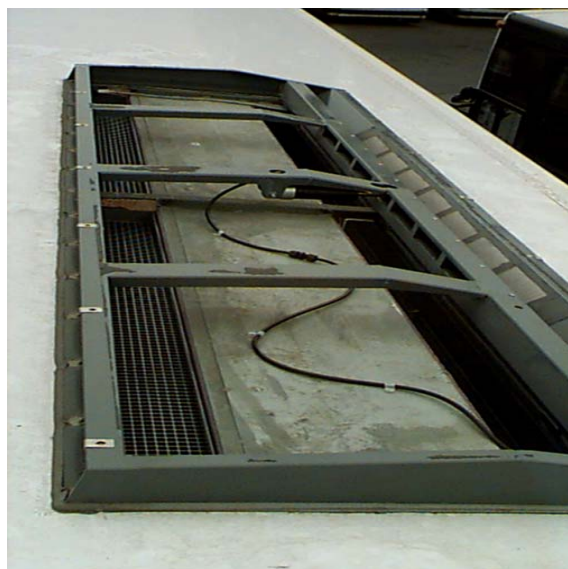

Step 2: Pry up on end of cover being careful, because cover is stuck down to the cross beams with silicone.



Step 3: Disconnect air line to insure the cylinder isn't under pressure. Then remove cylinder mounting bolt and remove cylinder from coach.