

**PARTS AND PRODUCTS:**

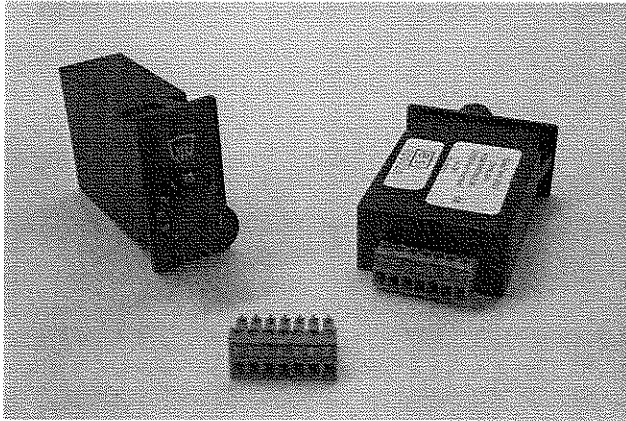


Figure 1: Old UWE Easy Term 2000 defroster control switch and 7 pin, non-secondary lock connector

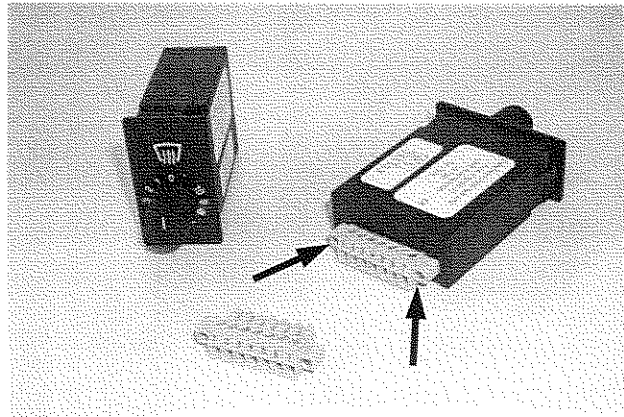


Figure 2: Same as Figure 1, but w/ secondary lock connector. Arrows indicate the captive screws which secure the connector to the housing.

**Old parts**

| Part No.    | Description                                     | Qty. |
|-------------|---|------|
| VH 10689684 | Control switch, UWE EasyTerm 2000 Defroster 24V | 1    |
| VH 10737771 | Connector, 7-pin for VH 10689684                | 1    |

**New parts**

| Part No.    | Description  | Qty. |
|-------------|--|------|
| VH 10689684 | Control switch, UWE EasyTerm 2000 Defroster 24V, incl. VH 10875691 | 1    |
| VH 10875691 | Connector, 7-pin secondary lock for VH 10689684 w/ captive screws  | 1    |

- Old and new parts are interchangeable, but only the new will be offered for service replacement.
- The secondary lock function is available only if the control switch is provided with threaded holes in the back of the housing. Plug retaining screws are captive and are not sold separately.
- Parts may be purchased from your nearest ABC Customer Care & Parts Source dealership.
- Parts and products disposition: discard according to applicable environmental regulations.

**PROCEDURE:**

*NOTE: Wires attach to the 7-pin connector by means of screw terminals.*

- To remove the plug from the control switch, simply undo both connector screws at the back of the housing using a small screwdriver, then withdraw the connector.
- To install, plug-in the connector while taking care not to bend the terminals, then secure finger tight with the screws.

*Procedure complete.*

**SERVICE INFORMATION:**

Service Bulletins are issued to supplement or supersede information in the Van Hool manuals. Note Service Bulletin number, date and subject on the register at the end of the relevant chapter(s). File Service Bulletin separately for future reference.